

Spacers & Pillars

Steel, Zinc Plated (CR3) - Metric

Product Overview


- Material acc. to DIN 176: 11 SMn Pb30
- Minimum tensile strength: 500 N/mm²
- Surface finish acc. to DIN 267: Zinc (A3 F)
- Material number: 1.0718
- Tolerance for length dimensions +/- 0.1 mm (DIN 2768-m applies to AF13)
- All products are also available without undercut.

Other materials available:

- Brass
- Stainless Steel
- Aluminium
- Black Nylon - Hexagon
- Black Nylon - Round
- White Nylon - Brass Thread
- Natural Nylon - Brass Thread



F/F - Female / Female Thread Spacer

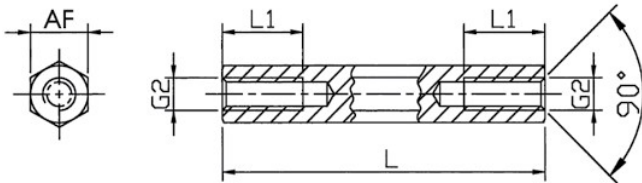

Internal Thread Lengths

L1 Length	G2						
	M2	M2.5	M3	M4	M5	M6	M8
5	5	5	5	5	5	5	-
8	8	8	8	8	8	8	-
10	10	10	10	10	10	10	-
12	6	12	12	12	12	12	-
15	6	15	15	15	15	15	15
18	6	9	9	9	9	9	-
20	6	10	10	10	10	10	20
from 30	6	10	10	10	10	12	14

Preferred Range

		Standard Lengths (mm)																						
		5	8	10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
Thread x Across Flats (AF)	M2 x 4	•	•	•	•	•	•	•	•	•	•													
	M2.5 x 4	•	•	•	•	•	•	•	•	•	•													
	M3 x 5	•	•	•	•	•	•	•	•	•	•	•												
	M3 x 5.5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
	M3 x 6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	M4 x 7	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	M4 x 8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	M5 x 8		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	M6 x 10			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	M8 x 13					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•